




HEATSINKS




SP 5003
WT – 0.861 KG/M
PERIMETER – 147.460 MM




SP 5119
WT – 0.864 KG/M
PERIMETER – 182.529 MM




SP 6785
WT – 0.805 KG/M
PERIMETER – 201.618 MM

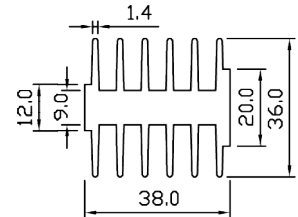


SP 5004
WT – 1.721 KG/M
PERIMETER – 404.0 MM

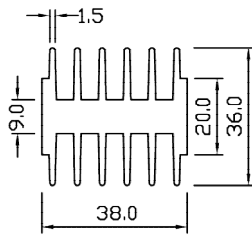


SP 5035
WT – 1.760 KG/M
PERIMETER – 404.183 MM

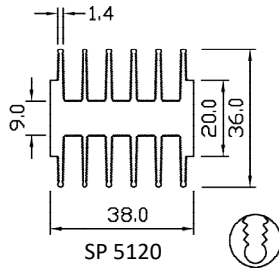


SP 5120
WT – 1.663 KG/M
PERIMETER – 531.186 MM

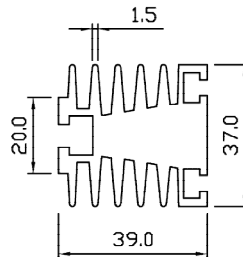


SP 6757
WT – 2.265 KG/M
PERIMETER – 422.730 MM

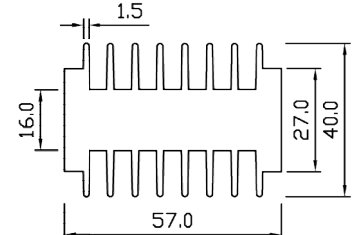


SP 5005
WT – 3.620 KG/M
PERIMETER – 513.269 MM

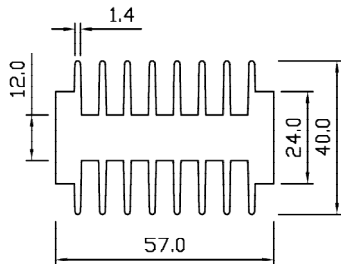


SP 5050
WT – 3.198 KG/M
PERIMETER – 568.223 MM

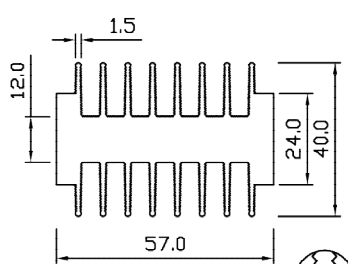


SP 5121
WT – 3.060 KG/M
PERIMETER – 745.047 MM

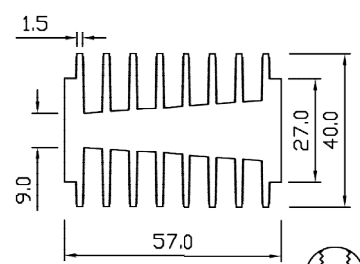


SP 5151
WT – 3.288 KG/M
PERIMETER – 731.030 MM

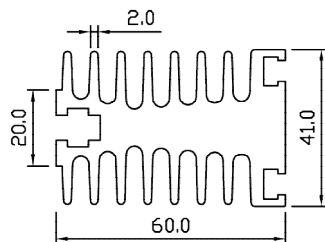


SP 6807
WT – 3.591 KG/M
PERIMETER – 598.698 MM

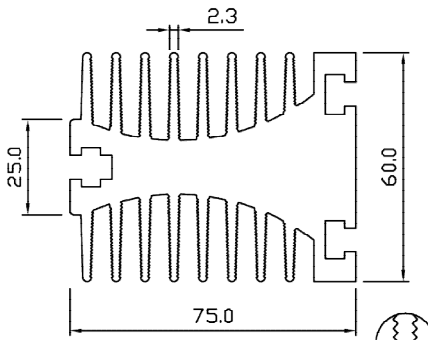


SP 7104
WT – 6.772 KG/M
PERIMETER – 1184.330 MM

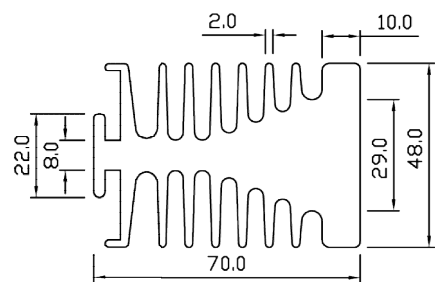


SP 5051
WT – 5.449 KG/M
PERIMETER – 679.709 MM

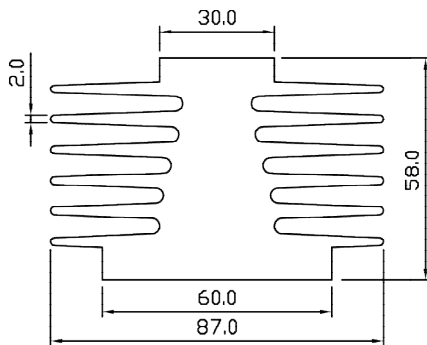

SP 8035
WT – 7.779 KG/M
PERIMETER – 870.206 MM

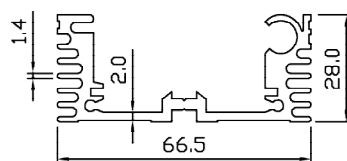


SP 6146
WT – 1.280 KG/M
PERIMETER – 426.107 MM

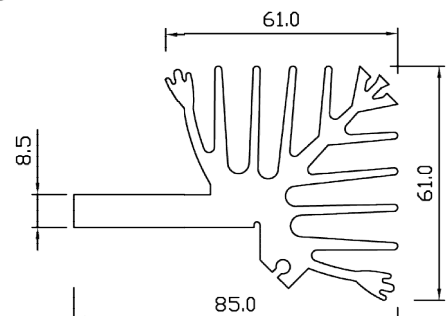


SP 0947
WT – 4.091 KG/M
PERIMETER – 753.761 MM


HEATSINKS

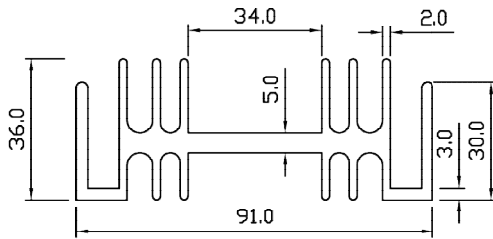


SP 5036
WT – 2.612 KG/M
PERIMETER – 641.097 MM

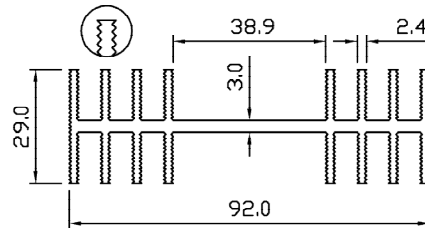


SP 5007
WT – 1.808 KG/M
PERIMETER – 780.798 MM




SP 5030
WT – 0.558 KG/M
PERIMETER – 143.824 MM

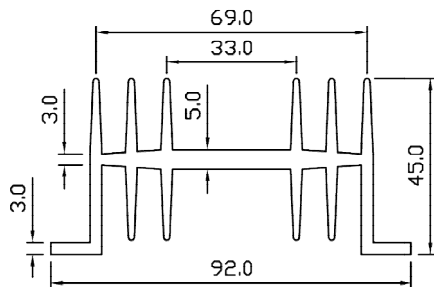


SP 5006
WT – 2.500 KG/M
PERIMETER – 632.982 MM

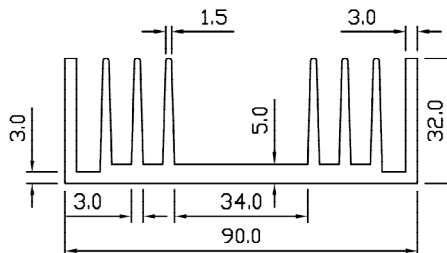


SP 5032
WT – 2.555 KG/M
PERIMETER – 617.264 MM




SP 5033
WT – 0.564 KG/M
PERIMETER – 145.200 MM

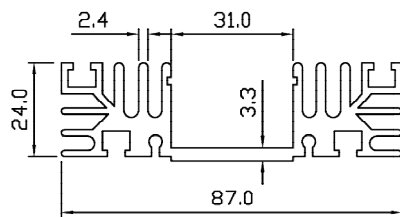


SP 5048
WT – 2.126 KG/M
PERIMETER – 617.949 MM

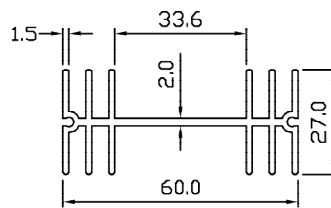


SP 5113
WT – 0.928 KG/M
PERIMETER – 422.283 MM

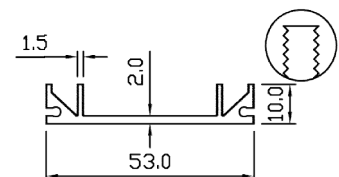


SP 5114
WT – 0.460 KG/M
PERIMETER – 209.389 MM

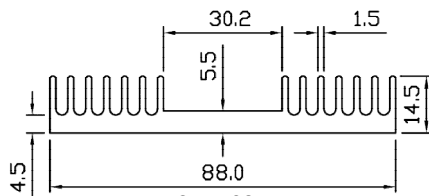


SP 5108
WT – 1.741 KG/M
PERIMETER – 438.192 MM

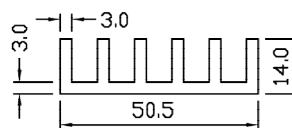


SP 5028
WT – 0.944 KG/M
PERIMETER – 239.00 MM

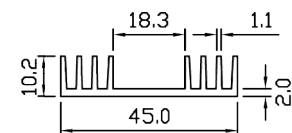


SP 5026
WT – 0.473 KG/M
PERIMETER – 222.058 MM

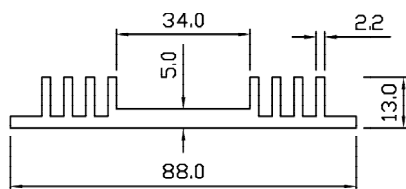


SP 5037
WT – 1.371 KG/M
PERIMETER – 338.00 MM

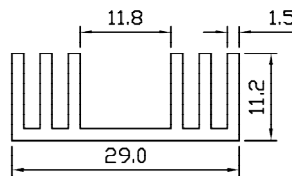


SP 5040
WT – 0.353 KG/M
PERIMETER – 177.400 MM

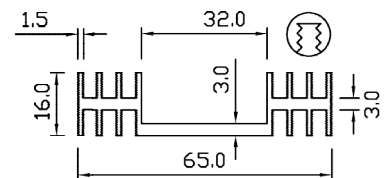


SP 5029
WT – 0.871 KG/M
PERIMETER – 424.272 MM

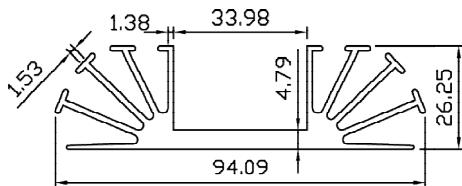

SP 7463
WT – 1.716 KG/M
PERIMETER – 575.592 MM

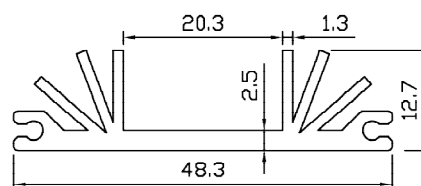


SP 0106
WT – 0.570 KG/M
PERIMETER – 240.132 MM




SP 6502
WT – 0.141 KG/M
PERIMETER – 104.721 MM


HEATSINKS

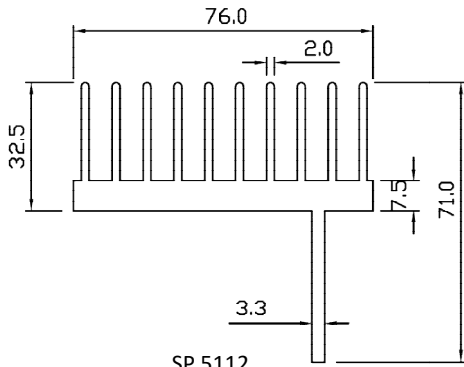


SP 5112
WT – 3.220 KG/M
PERIMETER – 735.416 MM

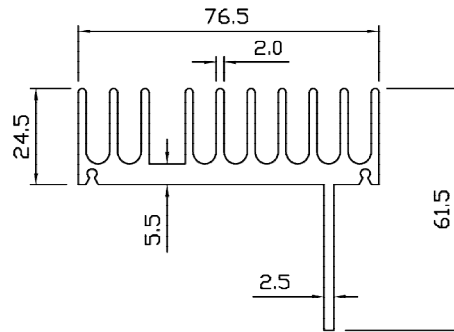


SP 5106
WT – 2.434 KG/M
PERIMETER – 603.578 MM

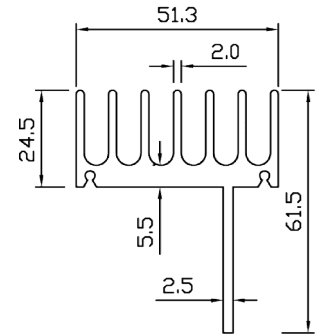


SP 5105
WT – 1.742 KG/M
PERIMETER – 446.045 MM

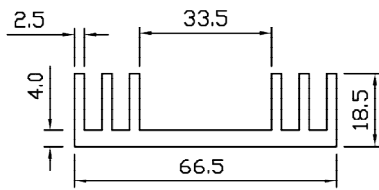


SP 5024
WT – 1.305 KG/M
PERIMETER – 315.00 MM

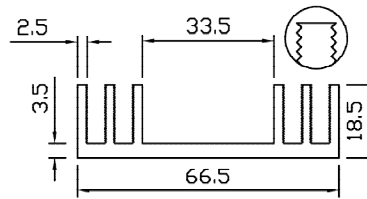


SP 5122
WT – 1.187 KG/M
PERIMETER – 568.223 MM

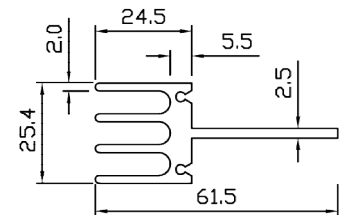


SP 5104
WT – 1.015 KG/M
PERIMETER – 291.362 MM

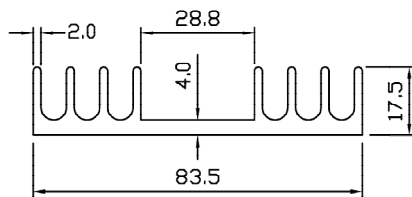


SP 5109
WT – 1.548 KG/M
PERIMETER – 367.523 MM

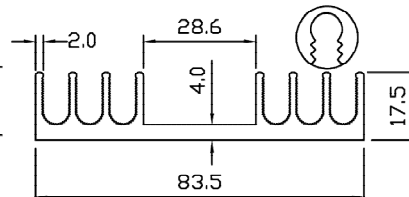


SP 5124
WT – 1.508 KG/M
PERIMETER – 434.637 MM

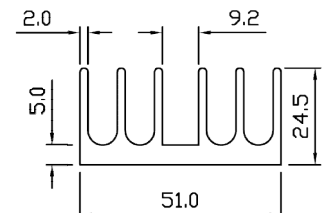


SP 5107
WT – 1.378 KG/M
PERIMETER – 328.059 MM

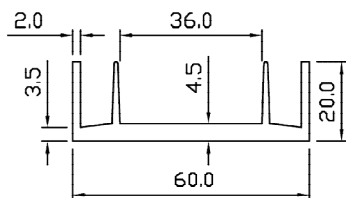


SP 5031
WT – 0.998 KG/M
PERIMETER – 252.299 MM

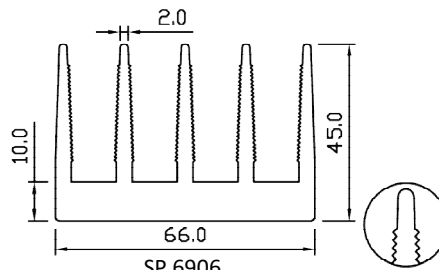


SP 6906
WT – 3.379 KG/M
PERIMETER – 569.770 MM

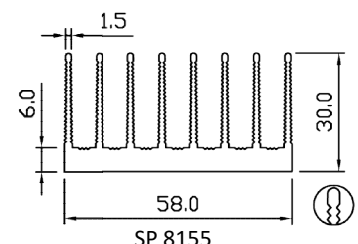


SP 8155
WT – 1.650 KG/M
PERIMETER – 603.055 MM

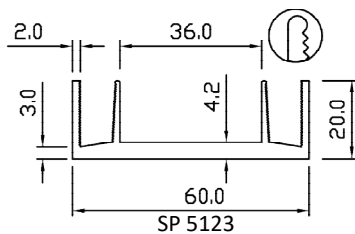


SP 5123
WT – 0.933 KG/M
PERIMETER – 281.106 MM

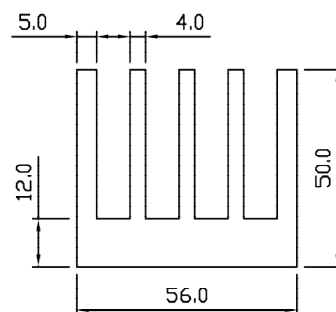

SP 0189
WT – 4.072 KG/M
PERIMETER – 516.000 MM

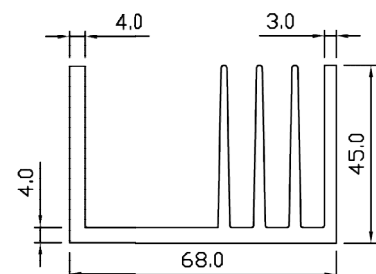

SP 6564
WT – 2.251 KG/M
PERIMETER – 546.367 MM

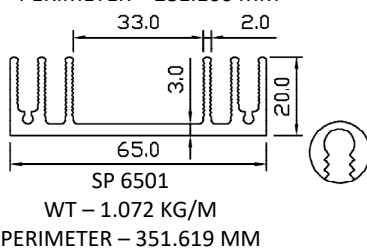

SP 6501
WT – 1.072 KG/M
PERIMETER – 351.619 MM

HEATSINKS

